


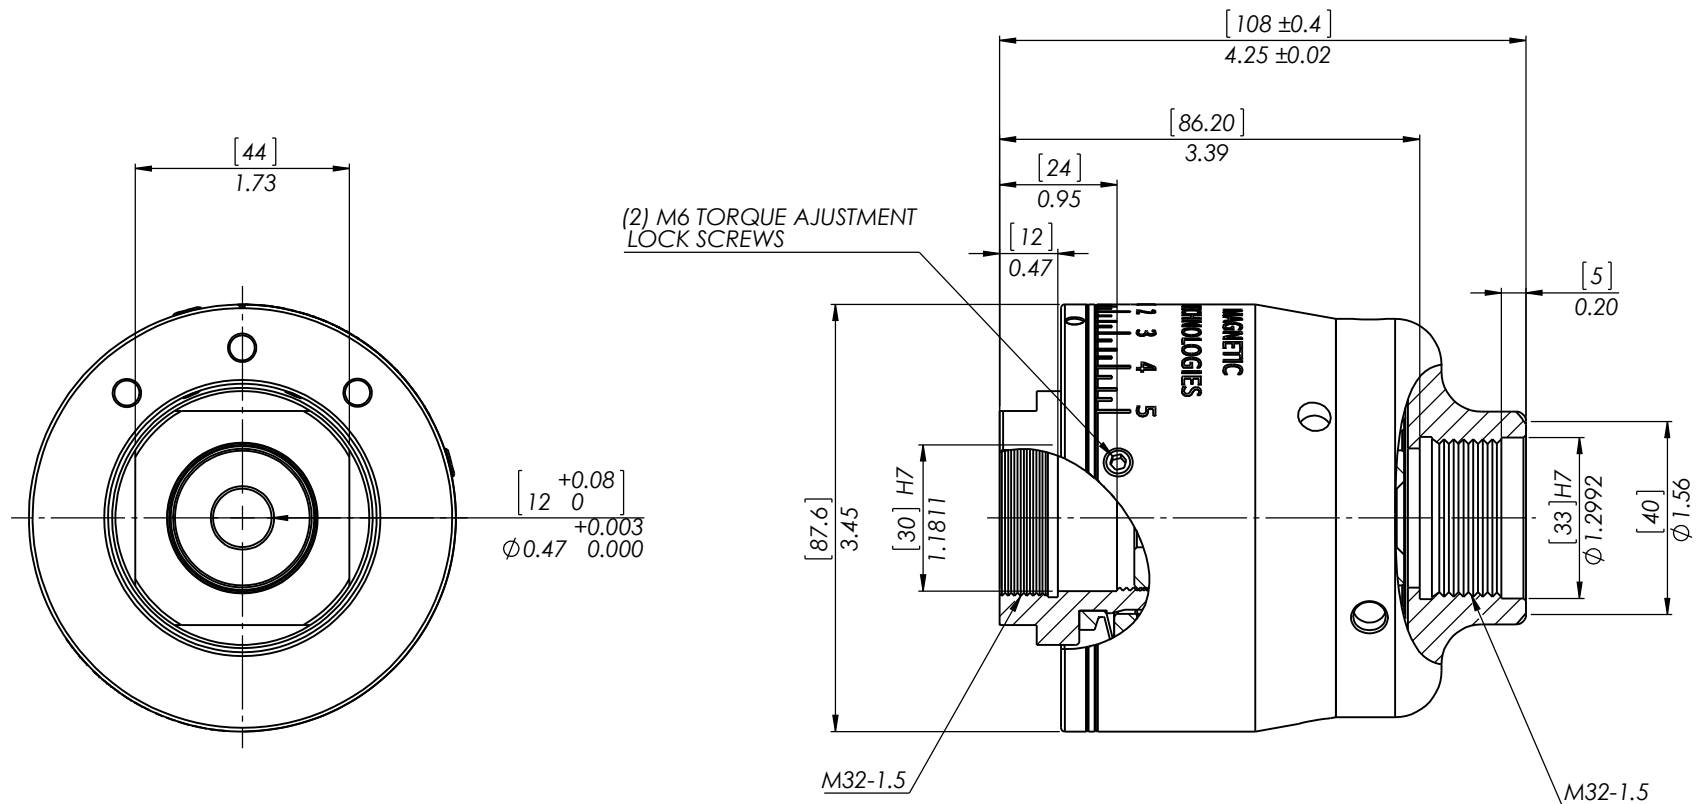

SPECIFICATIONS:

1. TORQUE RANGE: 0.9-3.38Nm (9-30In-Lbs)
2. HEAVY DUTY BEARING DESIGN
3. ENCAPSULATED MAGNETS
4. STAINLESS STEEL DESIGN
5. DOUBLE SEALED FOR HEAVY WASH DOWN
6. CLUTCH WEIGHTS 3Kg (6.6 LBS)

PROPRIETARY AND CONFIDENTIAL
THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LOENT, COPIED, REPRODUCED OR DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON	SCALE	MATERIAL	MAGNETIC TECHNOLOGIES LTD.	
	1:1	PER BOM		
UNLESS OTHERWISE SPECIFIED: ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .01 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .001 T.I.R. MACH. FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RVS 32 GEOMETRIC: TO MIL-STD-8 REMOVE ALL BURRS & SHARP EDGES			43 TOWN FOREST ROAD OXFORD, MA 01540	
			DESCRIPTION	
			CAPPING CLUTCH	
			DWG. NO. REV.	
			MCC35-010	