



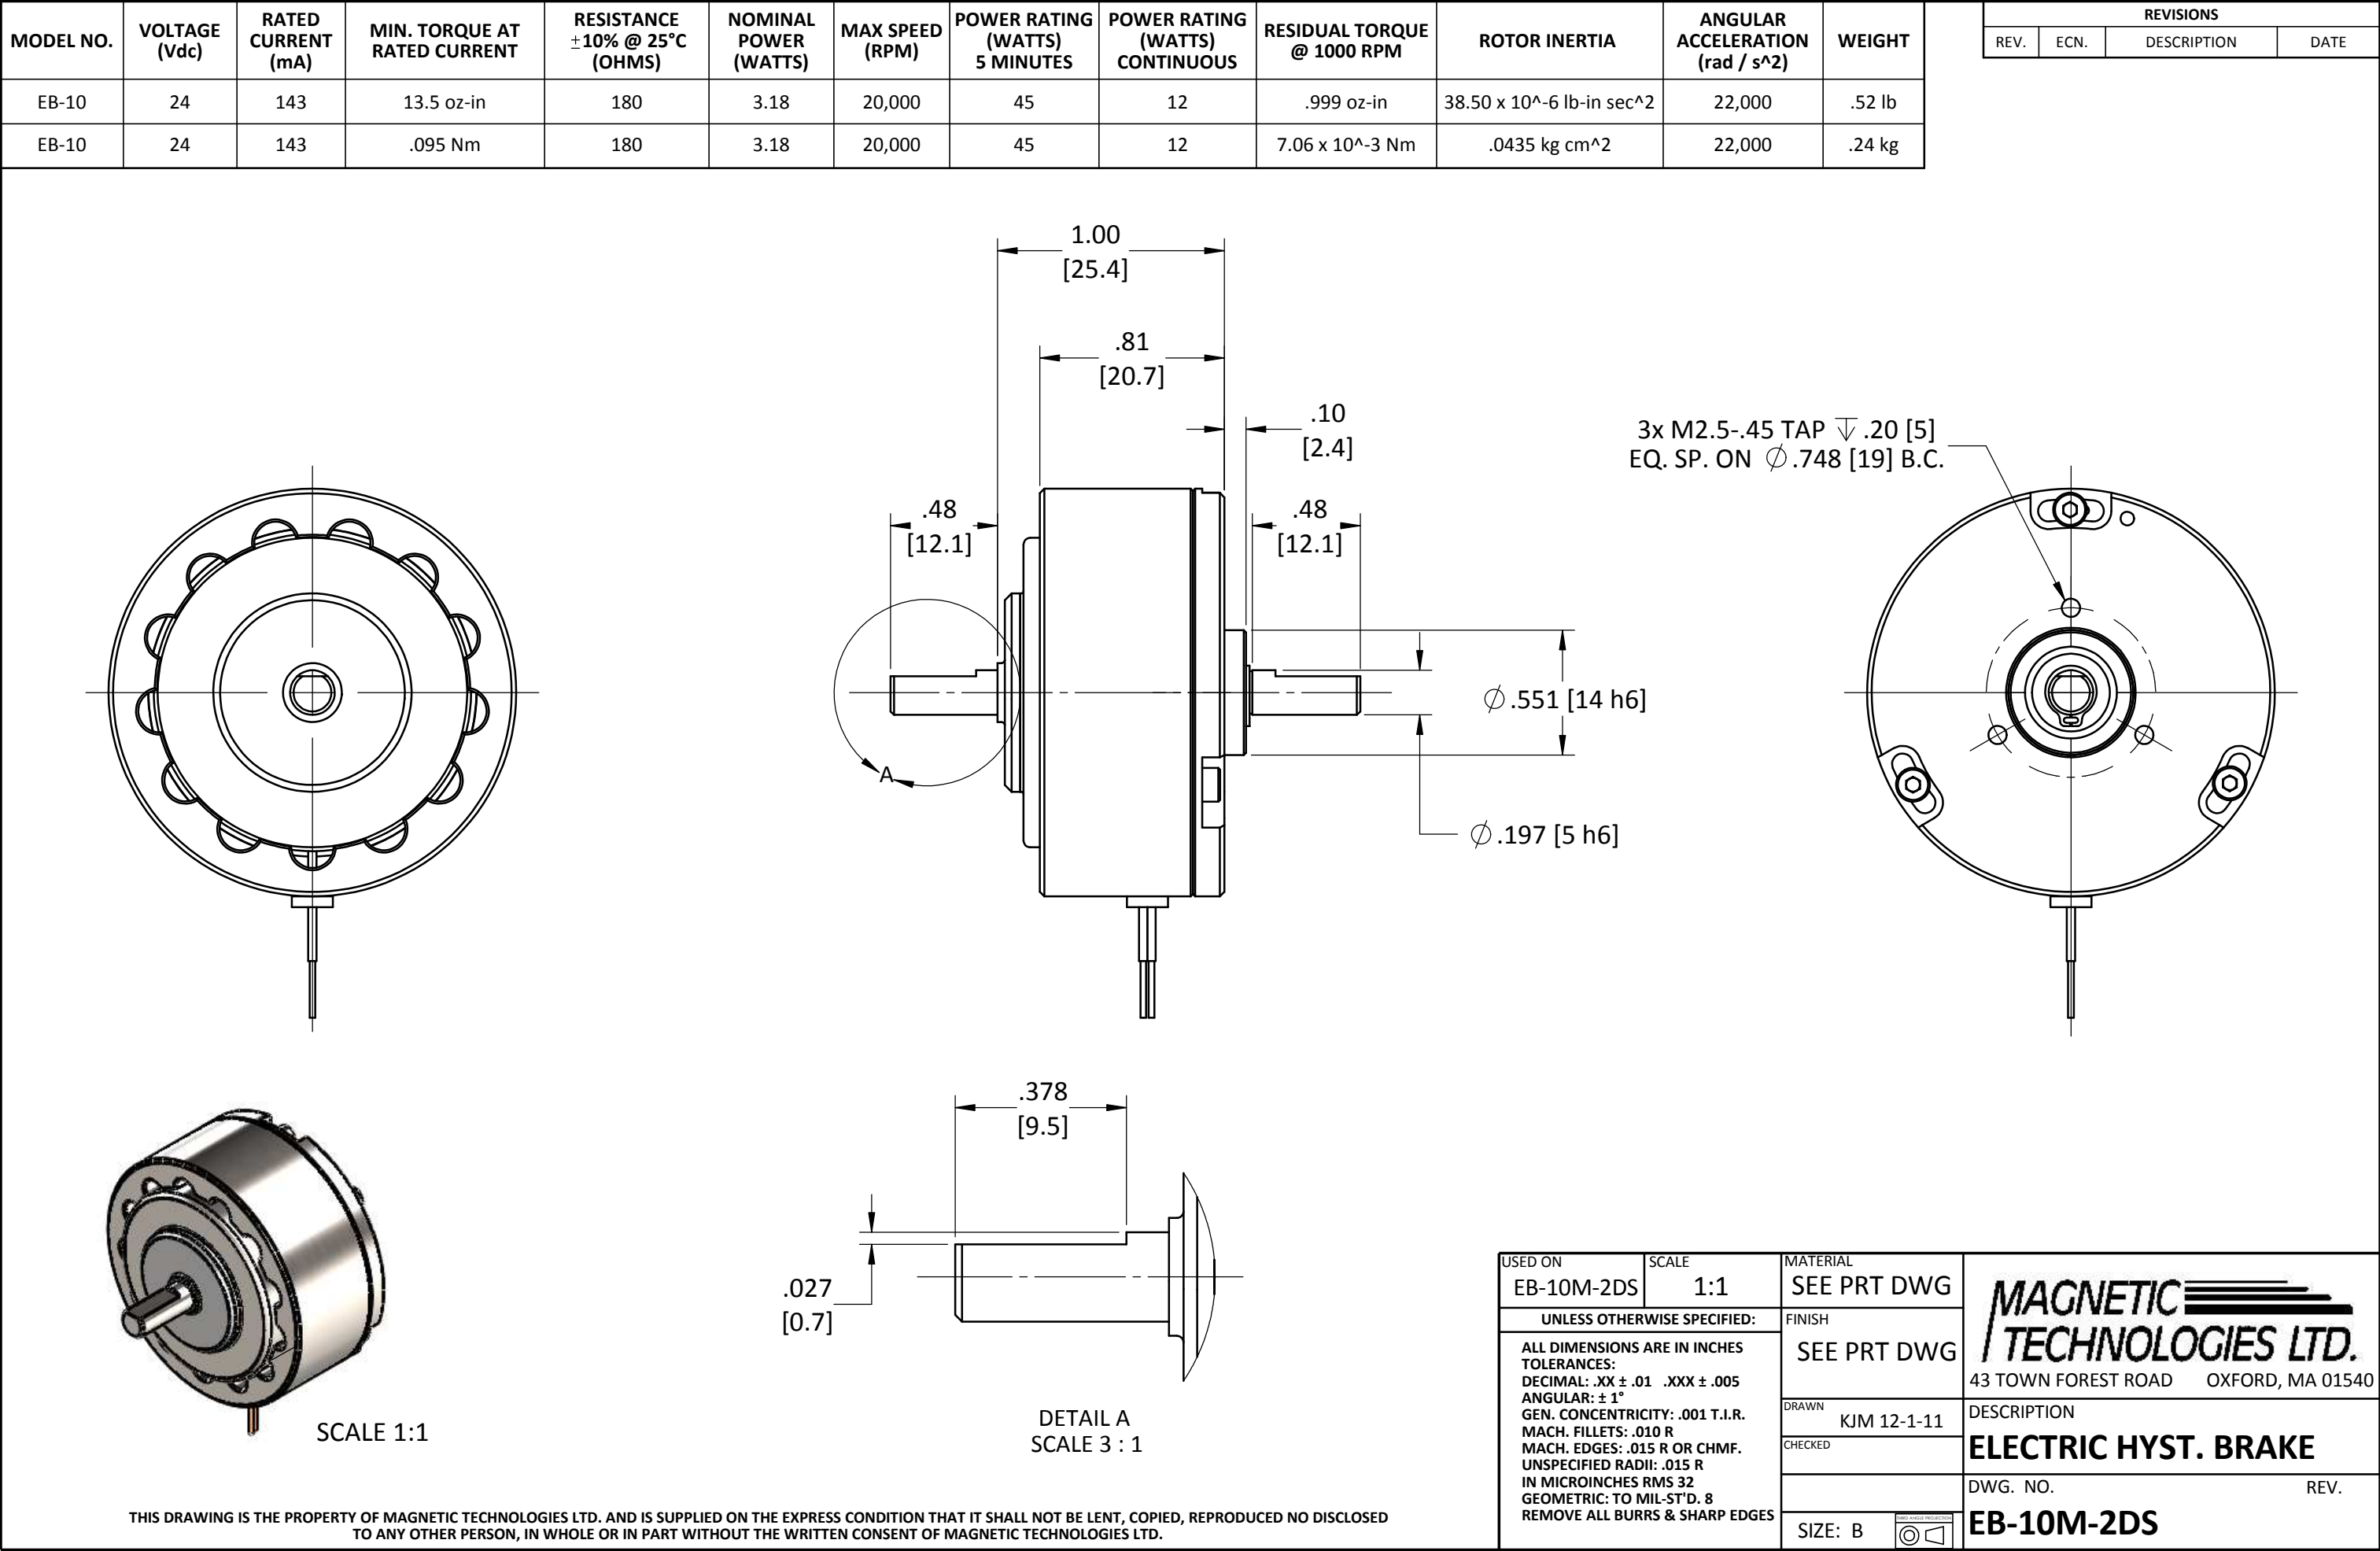

EB-10M-2DS ELECTRIC HYSTERESIS BRAKE
PERFORMANCE CURVE
TORQUE VS. CURRENT

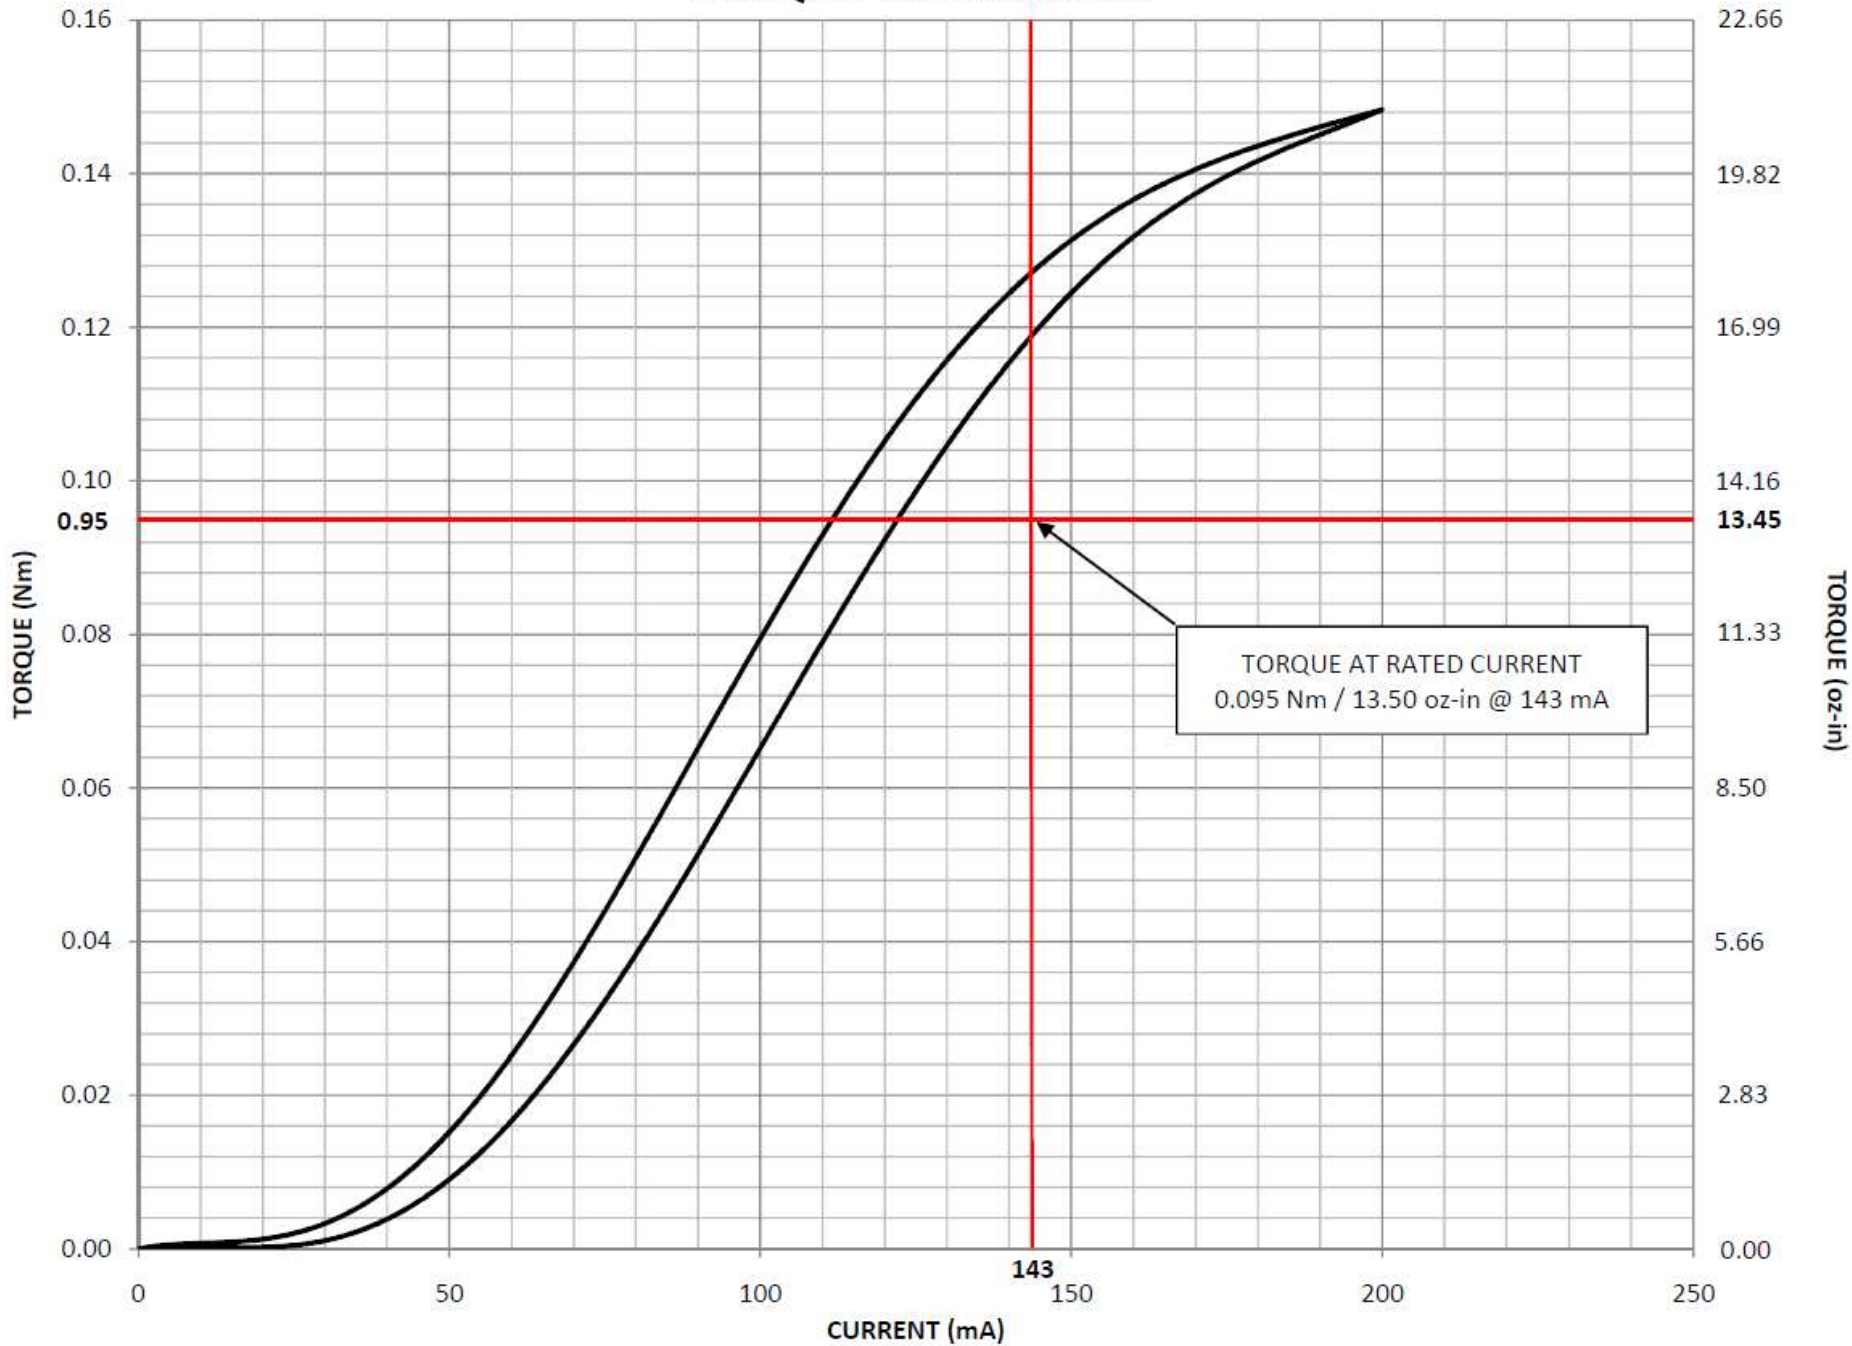

NOTE:
1. ACTUAL CURVE MAY VARY. THE TORQUE AT THE RATED CURRENT IS THE MINIMUM GUARANTEED TORQUE AT THAT CURRENT. TYPICAL BRAKES CAN BE 10-25% OVER RATED TORQUE, BUT THOSE RESULTS ARE **NOT** GUARANTEED.

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NO DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON	SCALE	MATERIAL	MAGNETIC TECHNOLOGIES LTD. 43 TOWN FOREST ROAD OXFORD, MA 01540
EB-10M-2DS			
UNLESS OTHERWISE SPECIFIED:		FINISH	DESCRIPTION
ALL DIMENSIONS ARE IN INCHES			
TOLERANCES:		DRAWN	TECHNICAL DATA
DECIMAL: .XX ± .01 .XXX ± .005		KJM 2-17-12	
ANGULAR: ± 1°		CHECKED	DWG. NO. REV.
GEN. CONCENTRICITY: .001 T.I.R.			
MACH. FILLETS: .010 R		WEIGHT:	EB-10M-2DS
MACH. EDGES: .015 R OR CHMF.		SIZE: B	
UNSPECIFIED RADII: .015 R			
IN MICROINCHES RMS 32			
GEOMETRIC: TO MIL-ST'D. 8			
REMOVE ALL BURRS & SHARP EDGES			