



M4-.70 TAP 8 (.31) DEEP
3X EQ SP ON 32 (1.260) B.C.
BOTH ENDS

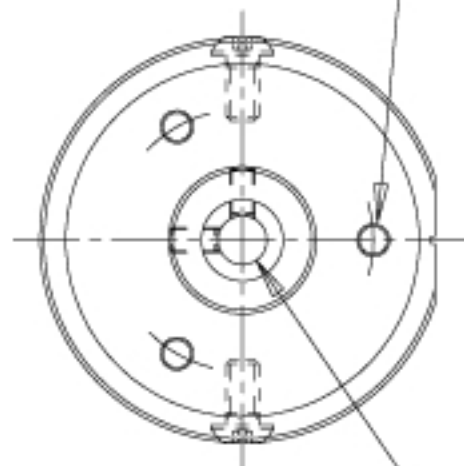

(2) M4 SET SCREW
90° APART

"B" +0.025
(+.001) THRU

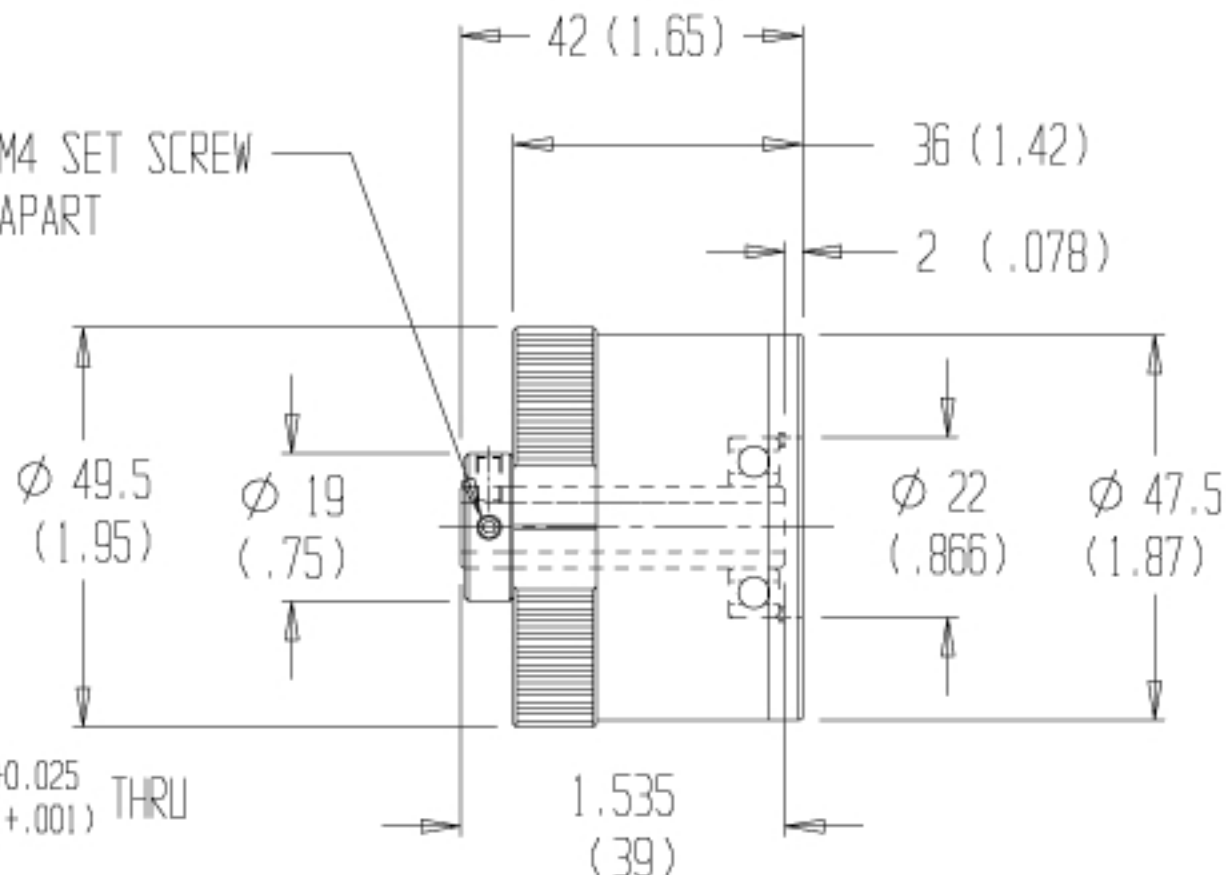

" B " BORE	MODEL No.
6mm (.236)	MTL 1.25-6
1/4 (.250)	MTL 1.25-1/4

TORQUE RANGE: 0.007 - 0.14 Nm (.06 - 1.25 lb/in.)
UNIT WEIGHT : 0.36 kg - (.78 lbs.)

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NOR DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.

USED ON	SCALE	MATERIAL
UNLESS OTHERWISE SPECIFIED		
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .010 .XXX ± .005 ANGULAR: ± 1° GEN. CONCENTRICITY: .003 T.I.R. MACH FILLETS: .010 R MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICROINCHES RMS GEOMETRIC: TO MIL-STD. 8 REMOVE ALL BURRS & SHARP EDGES		FINISH
		DRAWN JH 6/07
		CHECKED
		PROJ.ENG.
		APPROVED

MAGNETIC
TECHNOLOGIES LTD.

OXFORD, MA 01540-0257

HYSTERESIS CLUTCH

MTL 1.25-