


REV. NO.	ECN NO.	REVISION	BY & DATE
----------	---------	----------	-----------


(2) 1/4-28 SET SCREWS 90° APART
FOR LOCKING TORQUE ADJUSTMENT

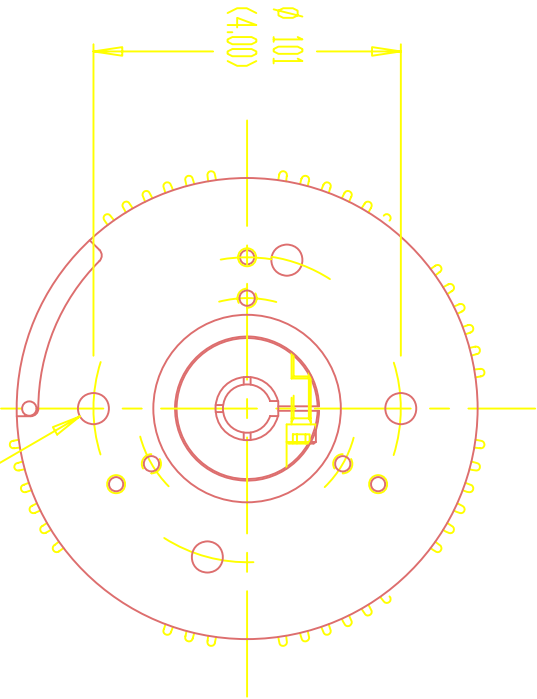


Ø 10.3(.41) X 8 (.31) DEEP 2X
BOTH ENDS FOR TORQUE ADJUSTMENT
USE SPANNER WRENCH

BIRE CHART

model #	B	T	W
MTL 70 - 5/8	5/8	.709	.187
MTL 70 - 16	16mm	18.3mm	5mm
MTL 70 - 19	19mm	21.8mm	6mm
MTL 70 - 3/4	3/4	.837	.187
MTL 70 - 7/8	7/8	--	--
MTL 70 - 1.0	1"	--	--

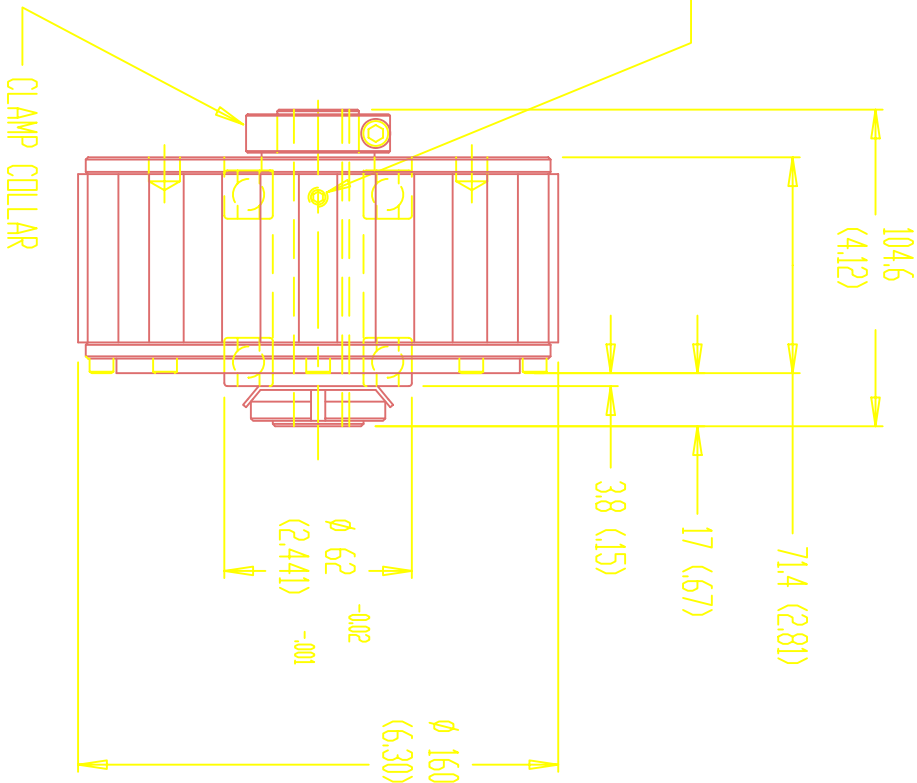


1/4-20 TAP 8 (.31) DP,
3X EQ SP DN 173 (2.875) B.C.
BOTH ENDS

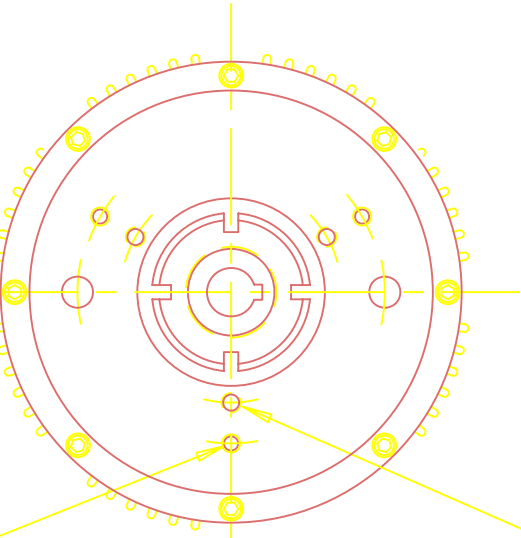

M6-1.00 TAP 10 (.39) DP,
3X EQ SP DN 86.3 (3.937)
BOTH ENDS

TORQUE RANGE : .33 - 7.9 Nm. (3 - 70 IN/LBS.)

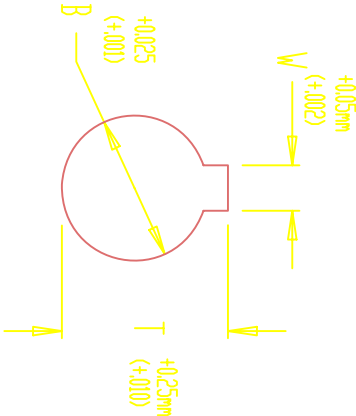

USED IN	SCALE	MATERIAL
UNLESS OTHERWISE SPECIFIED		
ALL DIMENSIONS ARE IN INCHES TOLERANCES: DECIMAL: .XX ± .010 .XXX ±.005 ANGULAR: ± 1° GEN. CONCENTRICITY: .003 T.I.R. MACH. FILLETS: .015 R OR CHMF. MACH. EDGES: .015 R OR CHMF. UNSPECIFIED RADII: .015 R IN MICRONDICES RMS GEOMETRIC: TO MIL-STD. 8 REMOVE ALL BURRS & SHARP EDGES		
FINISH	MAGNETIC TECHNOLOGIES LTD.	
DRAWN JH 8/05	OXFORD , MA 01540-0257	
CHECKED	HYSTERESIS CLUTCH	
PROJ.ENG.		
APPROVED	MTL 70- -----	

THIS DRAWING IS THE PROPERTY OF MAGNETIC TECHNOLOGIES LTD. AND IS SUPPLIED ON THE EXPRESS CONDITION THAT IT SHALL NOT BE LENT, COPIED, REPRODUCED NOR DISCLOSED TO ANY OTHER PERSON, IN WHOLE OR IN PART WITHOUT THE WRITTEN CONSENT OF MAGNETIC TECHNOLOGIES LTD.